

by Ryan J. Dexter, PE.

The condition of truss arching is explored.

Partition separation is defined by our industry as the cracking that develops at the interface between interior partition walls and ceiling or floor finishes, usually characterized by gaps that open in the winter and close in the summer. There are many reasons that cause partition separation, including what is termed "truss arching" by many in the field. From the calls we receive on this issue, truss movement is often blamed; but in actuality, truss movement causes partition separation in only a minority of the cases.

Let's take a look at why arching occurs and the degree to which it impacts truss deflection.

Truss arching is best described as an upward deflection of a truss resulting from a differential elongation or shrinkage between the top and bottom chords. Recall that wood swells as its moisture content increases and shrinks as its moisture content decreases. Therefore, an increase in the moisture content of the top chord relative to the bottom chord will cause an elongation of the top chord relative to the bottom chord. Similarly, a decrease in the moisture content of the bottom chord relative to the top chord will cause shrinkage in the bottom chord relative to the top chord. Since typically the top and bottom chords of a roof truss are firmly connected at the heel joint by a metal connector plate, if the differential movement between the chords is large enough, an "arching" or upward deflection (most pronounced at the midspan of the truss) can occur.

Truss arching has been known to occur during the winter following "close-in"; this is when the trusses were installed late in the year after having been subjected to wet or humid weather. The bottom chords of the trusses are typically enclosed in insulation and immediately begin "drying out" due to the heat from the living area below. In this scenario, the bottom chord begins to dry at a much faster rate than the top chord, causing shrinkage in the bottom chord relative to the top chord, which results in an upward movement of the trusses. If these trusses cross over interior partition walls that are nailed directly to the bottom chord of the truss, the arching of the bottom chord can cause a crack or gap to form at the corner joint between the ceiling and the top of the partition wall, or can actually lift the partition off of the floor below. In this situation, the arching will typically dissipate as the moisture content of the top and bottom chords equilibrate to the same level.

Truss arching has also been known to occur in existing structures on a seasonal basis, which usually indicates that the ventilation in the attic is inadequate, or that moisture from the house is escaping into the attic as opposed to being vented directly outdoors.

Example Calculation for Truss Arching

The following table shows the average longitudinal elongation/shrinkage values per 1% change in moisture content of three lumber species commonly used in metal plate connected wood truss construction:

Species	Changes Per 1% Loss in Moisture Content
Southern Pine	0.0127%
Douglas Fir-Larch	0.0073%
Hem-Fir	0.0063%

Continued on page 12

New WTCA Members

REGULAR MEMBERS

A-1 Roof Trusses
4451 Saint Lucie Blvd
Fort Pierce, FL 34946-9035
772/409-1010
Mr. John Herring

A. Potvin Construction
PO Box 969
Rockland, ON K4K 1L6
613/446-2203
Mr. Guy Simard

Bellbird Building Supplies
235 Princes Hwy
Melbourne, VIC 3803 AUSTRALIA
+61 3 9703 2444
Mr. Michael Tremewen

Circle Three Industries
PO Box 3036
Post Falls, ID 83877
208/773-7755
Mr. Carl Broadbent

Maki Corp.
101 Linus Allain Ave
Gardner, MA 01440
978/630-3916
Mr. Kevin LaClaire

Modu-Tech
1200 E Patapsco Ave
Baltimore, MD 21225-2233
410/355-1014
Mr. Mike Pigozzi

Mountain Grove Components
211 S Oak St
Mountain Grove, MO 65711
417/926-1311
Ms. Melanie W. Thompson

Pecos Valley Homes
96 San Marcos Loop
Santa Fe, NM 87508
505/424-1141
Mr. Carl Douglass
Sponsor: Mr. James Swanson

Penn-Truss Manufacturing, Inc.
PO Box 418
Saltcoats, SK S0A 3R0
306/744-2403
Mr. Colin Penner

Pine Lodge Truss, Inc.
103 W Pine Lodge Rd
Roswell, NM 88201-9435
505/623-9500
Mr. Gordon Wheat

Precision Framing System, Inc.
11922 General Dr
Charlotte, NC 28273
704/588-6680
Mr. Phillip Zurawski
Sponsor: Mr. Glenn Traylor

Rosamond Truss Inc.
PO Box 1876
Rosamond, CA 93561-1876
661/256-8575
Mr. Jim Browne

The Truss Company
4520 N St Louis St
Batesville, AR 72501-8233
870/793-5134
Mr. Vance Jarrett

Timber-Tech Truss Inc.

Box 121
Aldersyde, AB TOL 0A0
403/601-4565
Ms. Wendy Going

Titan Truss LLC
1108 14th St #431
Cody, WY 82414-3743
307/587-2187
Mr. Denny McVey

WBC Building Components
PO Box 1447
Columbia Falls, MT 59912
406/892-2171
Mr. Donald McGrady
Sponsor: Mr. Larry Pomeroy

ASSOCIATE MEMBERS

Mr. Kevin Beckstead
2730 N 4800 W
Corrine, UT 84307
435/744-5511

Bloch Lumber Company
123 N Wacker Dr Ste 1350
Chicago, IL 60606-1772
312/466-4500
Mr. Gregg S. Riley

Ferris Home Consulting
575 Bridge Rd Unit 10-5
Florence, MA 01062-1089
413/575-8802
Mr. Bradley Ferris

Fournier Industries
3787 West Frontenac Blvd
Theftford Mines, QC G6H 2B5
418/423-4241
Mr. Gaston Tanguay

Lenard Gabert & Associates
3801 Kirby Ste 415
Houston, TX 72098
713/527-0251
Mr. Lenard M. Gabert

My Builder LLC
5756 Lake Court NW
Kennesaw, GA 30152
770/595-5143
Mr. Angelo Sciortino

Packer Engineering
PO Box 353
Naperville, IL 60566-0353
630/577-1964
Mr. Mike Cahill

16085 Fish Rd Ste 10
Marysville, OH 43040-8925
614/214-1487
Mr. Michael R. Parks

Trehel Corporation
PO Box 1707
Clemson, SC 29678
864/654-6582
Mr. David Stokes

Listing as of 10/15/08.

For more information about WTCA membership, contact Anna (608/310-6719 or astamm@qualtim.com) or visit www.sbcindustry.com.

RRG Floor Truss System
9"-26" Trusses
No Set-Up Changes

M Series Floor Truss System
Why Buy Used!

Roadrunner PCT
High Production Multi-Family

RoIsplicer
OFTEN IMITATED - NEVER MATCHED
Chord Splicing Machine
Every floor truss starts with a tight splice!

LET US SHOW YOU HOW!

KLAISLER MFG. CORP.
1800 MUSICLAND DRIVE
FRANKLIN, IN 46131
PHONE: 877-357-3898
WWW.KLAISLER.COM

FLOOR TRUSS SYSTEMS

For reader service, go to www.sbcmag.info/klaisler.htm

MASTER PLANK®
BEAMS & HEADERS
STRONG • LIGHTWEIGHT • STABLE

BUILDING A TRADITION OF QUALITY PRODUCTS

- LVL Attractive Beams & Headers
- LVL Structural Stair Stringer Blanks
- LVL Specialty Plywood
- LVL Truss Chords (Alpine™ & MiTek® plate values)
- LVL 3-1/2" One-Piece Garage Door Headers
- LVL Scaffold Plank & Other Industrial Applications

KRB GLULAM®
COLUMNS • WINDOW & DOOR HEADERS

Finnforest USA *Out-performs solid sawn lumber and offers...*

- High strength to depth ratios
- Multiple span capabilities
- Building Code approvals and OSHA compliance

AN EXCELLENT VALUE!

*We produce thousands of products from wood...
The only limit is your imagination.*

finnforest **Finnforest USA**
Engineered Wood Division

www.finnforestus.com • 800/622-5850 • Fax: 586/296-8773

For reader service, go to www.sbcmag.info/finnforest.htm

We Sleep Well at Night!

Why? Because we sell solutions, not machinery. Of course, the solutions ultimately result in machinery sales, but we are promoting the equipment that fits the solution, not the equipment that optimizes our commission. Add the fact that we promote truss, wall panel and door equipment manufacturers that take pride in quality and service, and it's easy to see why we don't toss and turn.



800/382-0329 phone • 402/438-2524 fax
sales@wasserman-associates.com

Not Comfortable with Used Equipment?

Please consider the following:

- Satisfaction Guaranteed—if it's not right, we'll buy it back!
- Installation Services Available
- Leasing Available
- Shipping Coordination Is Included

Please contact us to sell your excess equipment!

For reader service, go to www.sbcmag.info/wasserman.htm

Technical Q&A

Continued from page 10

As an example of how truss arching can occur, let's assume we have a 28-ft span truss with an average moisture content of 19% that is installed in the roof of a house in northern Virginia in late November. Assume that Southern Pine is used in the chords and webs of this truss. Assume also that the house is quickly enclosed after the trusses are set with heat applied to the interior to aid with the finishing of the drywall and that the bottom chord is completely enclosed in insulation soon after (see Figure 1). Under these conditions the bottom chord dries over a couple of months from 19% to 7%. This equates to a 12% difference in moisture content. Meanwhile, the moisture content in the top chord remains relatively unchanged.

If southern pine shrinks 0.0127% per each 1% loss in moisture content, we can expect shrinkage of approximately 0.001524 in./in. due to the 12% loss (i.e., $0.000127 \times 12 = 0.001524$ in./in.). The bottom chord is 336 in. long (i.e., 12 in./ft. x 28 ft.). Therefore, the potential overall shrinkage of the bottom chord is approximately 0.001524×336 in. = 0.512 in.

Because the bottom chord is restrained by the top chord and the webs (also because the chords are typically constrained at the heels due to the bearing connection), this shortening could potentially produce an upward deflection of the bottom

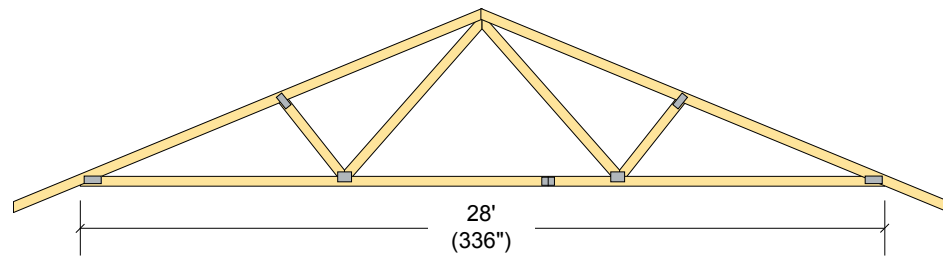


Figure 1.

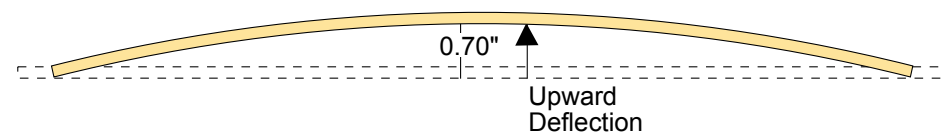


Figure 2.

chord of approximately 0.70 in. using the mathematical relationships between an arch and chord of a circle (see Figure 2).

The above example is idealized. Remember that the percentages listed in Figure 1 are averages. This means that because of variations between species, variations between trees from different forests, the age of the trees when cut, and variations in the lumber within the same tree, elongation and shrinkage does not always take place uniformly, and sometimes does not occur at all. In addition, slight slippage of the wood around the metal teeth of the truss plate, the orientation of the growth rings in the lumber, the number of pieces used to form the lower chord, the way the trusses are fastened to the walls, the amount of ventilation, the relative humidity, and the thickness of the insulation make predicting when partition separation will occur very difficult if not impossible.

Because of all these reasons and the fact that truss movement is not typically found to be the cause when a rigorous assessment of movement in the building is made, it is generally not reasonable to blame trusses for partition separation. The only way to know for sure that truss movement is taking place is to use a laser level to assess all the areas of potential movement in the structure. The foundation must be level, the walls square, the top plates level, the floor level and so forth. Building shrinkage/movement can come from a variety of sources. Once the cause is known, remediation is easier.

Again, truss arching is just one of several factors that can cause partition separation. We have provided a way to quickly assess the amount of relative shrinkage that the lumber used in a truss may accrue. This is intended to provide information that will help the evaluation of truss movement in a building. To learn more about the factors that can cause partition separation refer to WTCA's Truss Technology on Building (TTB) brochure, *Partition Separation Prevention and Solutions*, available at www.sbcindustry.com/ttbpartsep. **SBC**

To pose a question for this column, call the WTCA technical department at 608/274-4849 or email technicalqa@sbcmag.info.

READY TO JOIN THE SCORE RANKS?



Cascade Mfg Co
www.cascade-mfg-co.com
Cascade, IA

Tri-County Truss, Inc.
www.tricountytruss.com
Burlington, WA

Lumber Specialties
www.lbrspec.com
Dyersville, IA

ProBuild Manufacturing
www.carterlee.com
Indianapolis, IN

True House, Inc.
www.truehouse.com
Jacksonville, FL

Truss Craft
www.dakotacraft.com
Cheyenne, WY

Dakota Craft Truss
www.dakotacraft.com
Rapid City, SD

Shelter Systems Limited
www.sheltersystems.com
Westminster, MD

Truss Systems, Inc.
www.trussystemsinc.com
Oxford, GA

Plum Building Systems, LLC
www.plumbuildingsystemsinc.com
West Des Moines, IA

Sun State Components of Nevada, Inc.
www.sunstatenv.com
North Las Vegas, NV

Buy a package subscription and be well on your way!

- ★ SCORE package subscriptions are available for each level of certification. ★
- ★ These packages bundle required programs together and offer them all to you at an average of **50% OFF STANDARD PRICES!** ★
- ★ This is your way to get SCORE certified quickly, economically and at whatever level you choose. ★
- ★ Find out more, and how to get your dues reduced, at www.sbcindustry.com/scorepackages.php. ★



Structural Component Operations Reaching for Excellence

For reader service, go to www.sbcmag.info/sbca.htm

STRUCTURAL BUILDING **COMPONENTS**TM

THE FUTURE OF FRAMING

www.sbcmag.info

Dear Reader:

Copyright © 2008 by Truss Publications, Inc. All rights reserved. For permission to reprint materials from **SBC Magazine**, call 608/310-6706 or email editor@sbcmag.info.

The mission of **Structural Building Components Magazine (SBC)** is to increase the knowledge of and to promote the common interests of those engaged in manufacturing and distributing of structural building components to ensure growth and continuity, and to be the information conduit by staying abreast of leading-edge issues. SBC will take a leadership role on behalf of the component industry in disseminating technical and marketplace information, and will maintain advisory committees consisting of the most knowledgeable professionals in the industry. The opinions expressed in SBC are those of the authors and those quoted solely, and are not necessarily the opinions of any affiliated association (WTCA) .



6300 Enterprise Lane • Suite 200 • Madison, WI 53719
608/310-6706 phone • 608/271-7006 fax
www.sbcmag.info • admgr@sbcmag.info